




ACL.28 HID

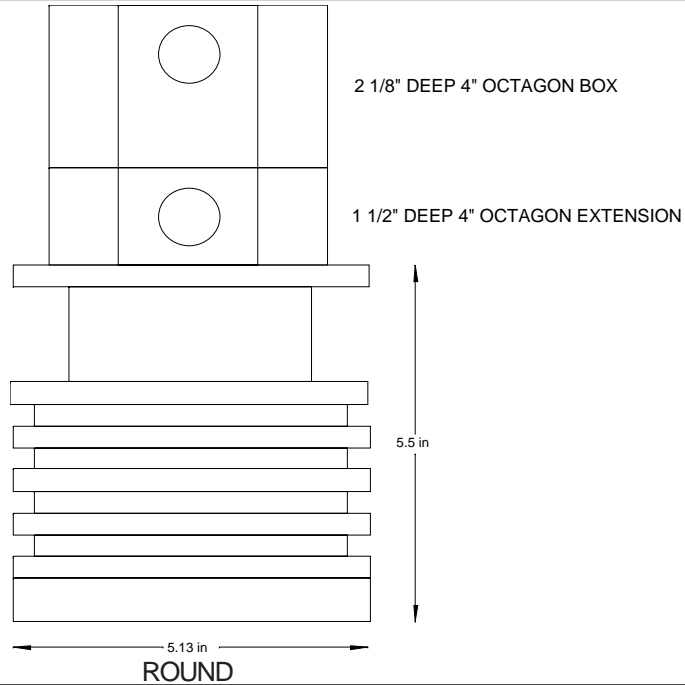

SPECIFICATIONS

Material

Machined aluminum.
Polished anodized aluminum reflector. Borosilicate frosted lens.

Mounting

20 or 39w CMH: Mounts to 4" octagon box with extension. May be mounted to 4" octagon box and remote mounted ballast.

Electrical

ETL damp location listed. CMH Ballast in jbox or remote ballast 50' max. distance.

Finish

Micro brushed with clear coat after fabrication before assembly.

ORDERING LOGIC

Use matrix below to order complete fixture

Fixture	Lamping	Voltage					
ACL.28	20w MH T4.5 G8.5 39w MH T4.5 G8.5	120v 277v					
ACL.28							