




APD .02

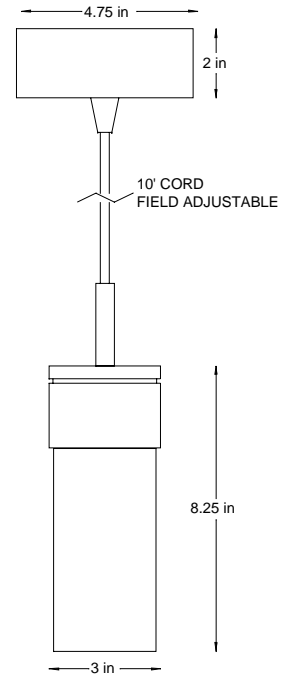

SPECIFICATIONS

Material

Machined aluminum with stainless steel fasteners.
 Lens: UV Stable white opal acrylic

Mounting

Mounts to octagon junction box or 4" square junction box with round plaster ring. 10' field cuttable clear cord

Electrical

ETL damp location listed. Electronic ballast in canopy.

Finish

Micro brushed with clear coat after fabrication before assembly.

ORDERING LOGIC

Use matrix below to order complete fixture

Fixture	Lamping	Voltage					
APD.02	F13 G24q1 F18 G24q2 F26 G24q3	120V 277V					

*Required