




Lightwedge

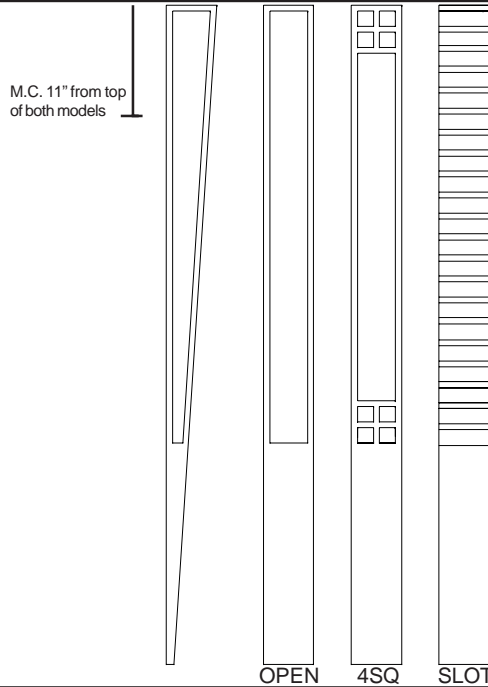

SPECIFICATIONS

Construction

Backplate: is a .031" steel.
Decorative Front: is .036" for nickel plated steel.

Finishes

Finish plated satin nickel with clear lacquer coating

Electrical

ETL listed dry location only.
Specify 120 or 277v. Lamps by others.

Lensing

.125 UV stable white acrylic lens standard.

Mounting

Mounts to vertical single gang junction box.

Modifications

Contact local representatives or factory for size, lamping, lens or finish modifications.

ORDERING LOGIC

Use matrix below to order complete fixture

Family	Model	Lamping	Voltage*	Perforation	Finish	Lens	
LWW	43"x4"x4"	F14 T5	120v	Slot Open 4 Square	SN Satin Nickel	White Aryclic	
	55"x4"x4"	F21 T5	277v				

*Required