




Triple Tier Wall

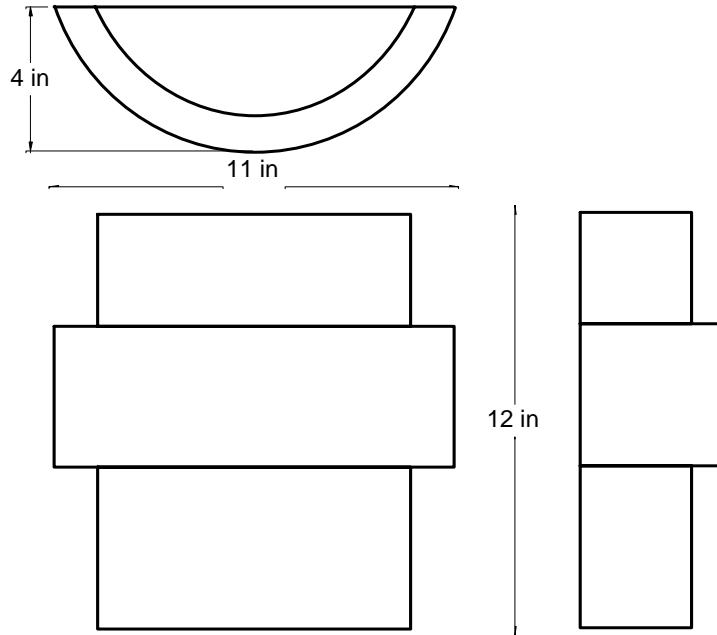

SPECIFICATIONS

Construction

Fabric laminated to self extinguishing vinyl. Transparent fire retardant applied after fabrication.

Mounting

Incandescent mounts to octagon jbox. Fluorescent mounts to 4" square junction box.

Electrical

ETL listed dry location only. Specify 120 or 277v. Fluorescent ballast in jbox. Lamps by others.

Modifications

Contact local representatives or factory for size, lamping, lens or finish modifications.

ORDERING LOGIC

Use matrix below to order complete fixture

Family	Model	Lamping	Voltage*			Material	Material	Material
TTW	12x11x4	C60 Candleabra F18 G24Q2 Custom	120v 277v			Linen White Cream Champagne Tan Celery Red Grape Green Apple Maize	Silk Platinum Lt. Bronze Copper	Raw Silk White Lt. Bronze Med. Bronze Gold

*Required for fluorescent