



Illuminer 12x12xR


Recessed Ceiling and Wall Mount




Pyramid Form



Sun Form



Delta Form

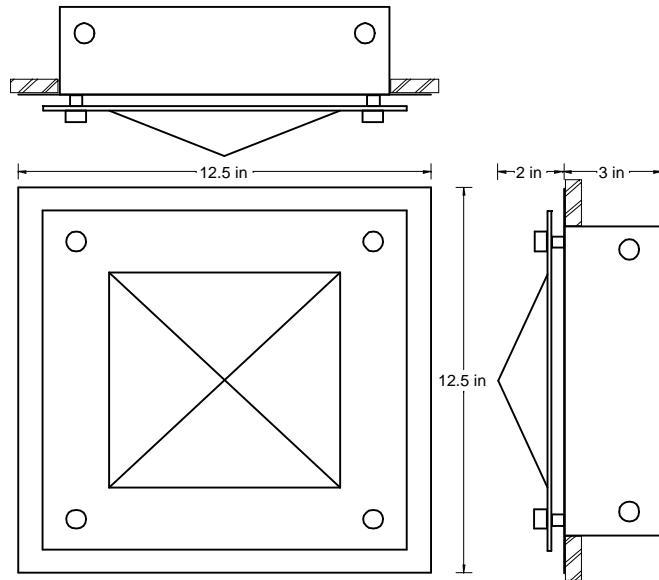

SPECIFICATIONS

Construction

Backplate/ballast housing is 22ga. zinc coated cold rolled steel.

Shielding

.250 plate glass standard. Starphire glass available. Fused glass available in 24 colors.

Electrical

UL listed dry location only. Specify 120 or 277v. Lamps by others.

Finish

Polyster powder coat after fabrication

Hardware

Available in satin nickel

Mounts

Mounts to stud walls. Ceiling mount using supplied butterfly brackets.

ORDERING LOGIC

Use matrix below to order complete fixture

Family	Model	Lamping	Voltage**	Hardware	Glass Form	Options
ILL Illuminer	12x12xR	1X13 GX23* 2x13 GX23* 1X18 G24Q2 2x18 G24Q2 1X26 G24Q3 2x26 G24Q3 1xC60 Candelabra	120v 277v	Satin Nickel	Sun Pyramid Delta Flat	Fused Glass Sand Carved Glass

* 120v only

**Required