



# Illuminer Linear


**Recessed**

## CONSTRUCTION

.031" CRS Steel Housing. White powder coat after fabrication.

## DIFFUSER

.25" tempered low iron super white glass standard. Optional textured glass with white acrylic diffuser.



RB



LR



SQ



SC

## MOUNTING


NW=New construction bar hangers  
RM=Remodel clips

## ELECTRICAL

ETL listed. Specify 120 or 277v.  
Lamps by others.

## MODIFICATIONS

Contact local representative or factory for size, lamping or color modifications.

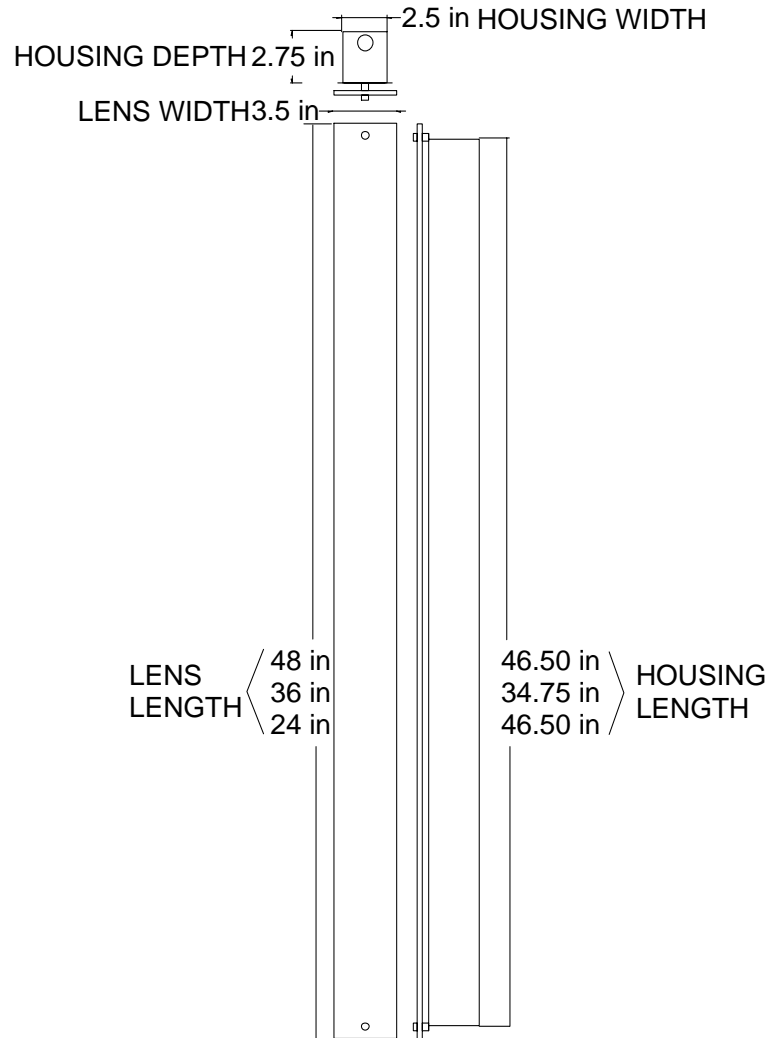

## ORDERING LOGIC

Use matrix below to order complete fixture.

Fixture	Size	Lamping	Voltage	Mounting	Glass	Options
ILLL	24"	14W T5	120	NW New Construction RM Remodel	WE White Etched	DIM* EM**
		24W T5HO			RB Rainbead	
	36"	21W T5	277		LR Linear Prism	
		39W T5HO			SC Screen	
48"	28W T5		SQ Square			
	54W T5HO					
ILLL						

\*ECO 10 integral.  
\*\*Integral battery for 36" & 48" remote for 24".  
Remote test switch for all.