

Stiletto™ MonoAL/Duo

SPECIFICATIONS

Construction

Base: Machined Billet Aluminum

Tube: 1.25" dia.

Reflector: Aluminum with high reflectance white paint.

Lensing

UV stable extruded clear or white linear prismatic acrylic

Finish

Brushed aluminum with clear coat

Brushed nickel with clear coat

Mounting

Mounts vertically to single gang junction box. Tube rotates 330°


Electrical

ETL listed damp location.

Specify 120 or 277v. Lamps by others.

Modifications

Contact local representatives or factory for size, lamping, lens or finish modifications.

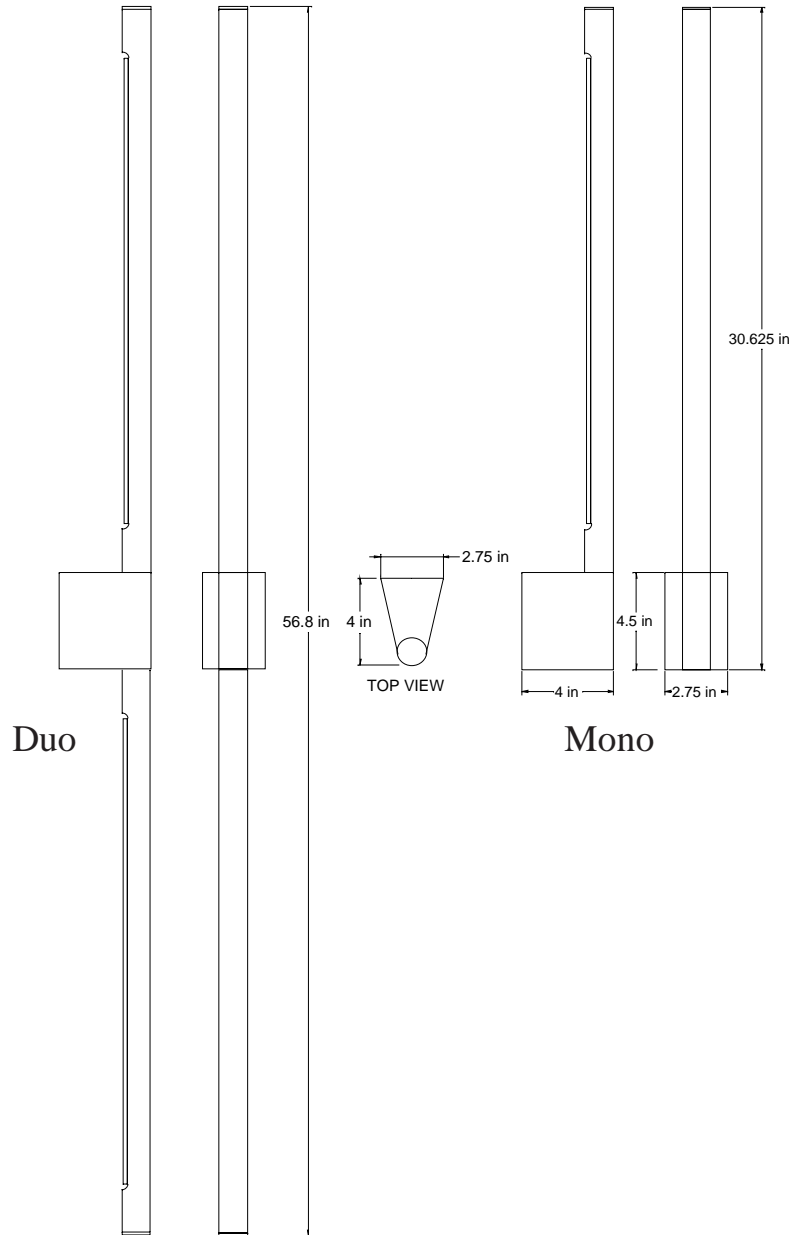

ORDERING LOGIC

Use matrix below to order complete fixture

Family	Finish	Lamping	Voltage*	Options
STM	N Nickel	1xF14 T5	120v	PR Prismatic Lens
STD	A Aluminum	2xF14 T5	277v	AC White Lens

*Required