




# Stiletto™ Table

Table Light

## Sections can be joined in the field for continuous runs

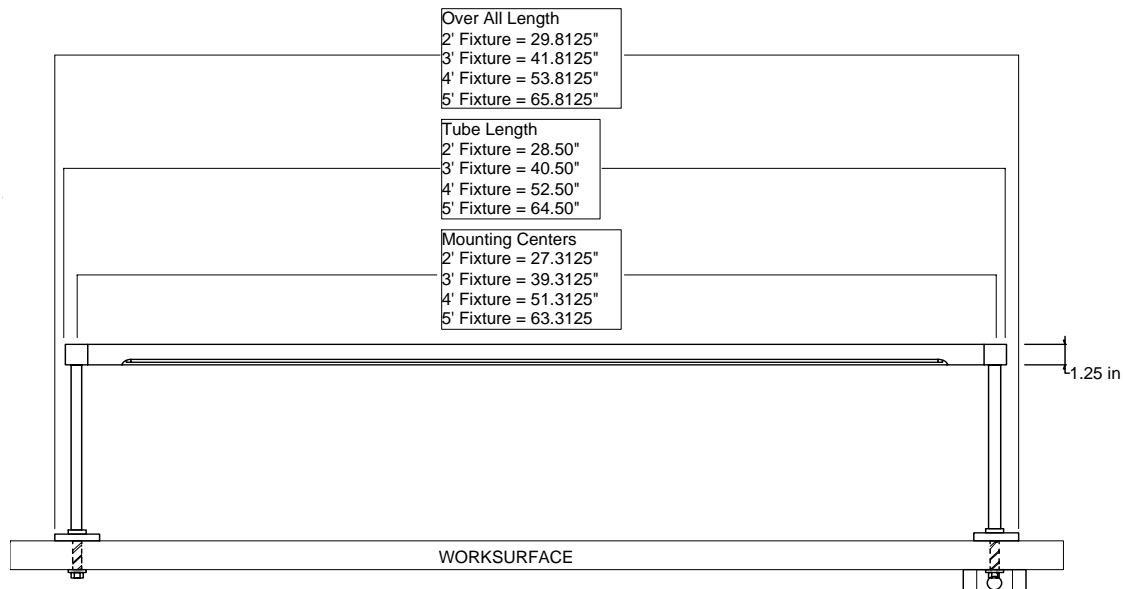

## SPECIFICATIONS

### Construction

Tube: 1.25" diameter

Reflector: Aluminum with high reflectance white paint

Rotators: 330 deg max rotation with lock.

Lens: UV stable acrylic available in clear or white linear prismatic.

Stem: 12" overall height standard. Optional heights available.

### Finish

Brushed Aluminum with clear coat

Brushed Nickel with clear coat

### Mounting

Through bolted to work surface.

Mounts to deep 4x4 junction box.

Fixtures can be joined in field to create continuous run. Specify number of sections.

### Electrical

ETL listed damp location.

Lamps supplied by others.

Electronic ballast mounted in junction box under work surface.

12' three conductor cord supplied with fixture. Optional Switch mounted to Jbox under table.

## ORDERING LOGIC

Use matrix below to order complete fixture

Family	Finish	Model	Lamping	Table Thickness	Voltage	Stem	Row Mount*	Lens	Options
STLT	N Nickel	2'	F14 T5		120v	12"	Specify number of sections to be linked	PR Prismatic AC White	SW Switch
	A Aluminum	3'	F21 T5						
		4'	F28 T5						
		5'	F35 T5						
STLT			Inches	120v	12"				

\*Each section requires a jbox and ballast