




Stiletto Table

Table Light

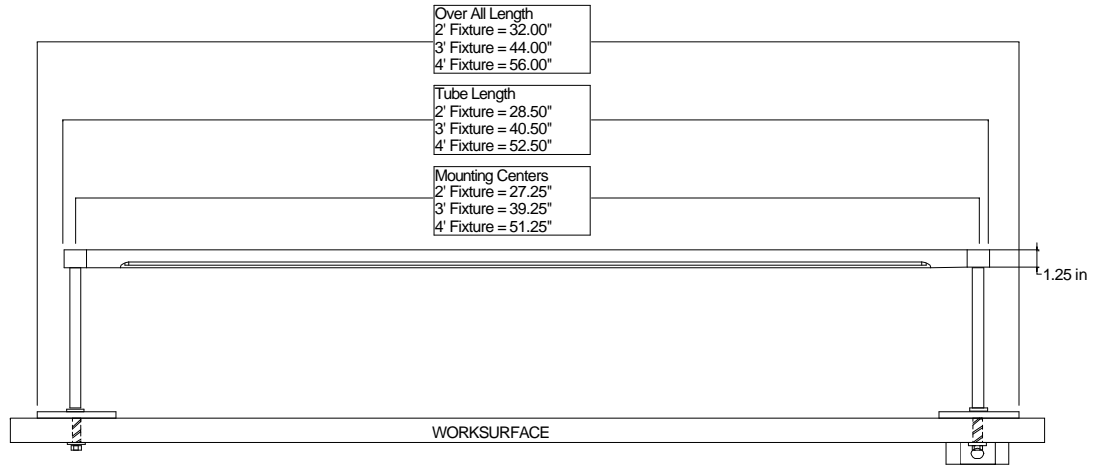

SPECIFICATIONS

Construction

Tube: .048" cold rolled steel.
Reflector: .025" steel with high reflectance white paint
Rotators: Solid machined brass. 330 deg max rotation with lock.
Lens: UV stable acrylic available in clear or white linear prismatic.
Stem: 12" overall height standard.

Finish

Satin nickel with clear lacquer coating. Contact Agati for alternative finish options

Mounting

Through bolted to work surface. Mounts to deep 4x4 junction box. Fixtures can be joined in field to create continuous run. Specify number of sections.

Electrical

UL listed dry location only. Lamps supplied by others. Electronic ballast mounted in junction box under work surface. 12' three conductor cord supplied with fixture.

ORDERING LOGIC

Use matrix below to order complete fixture

Family	Model	Lamping	Ballast	Voltage	Stem	Row Mount*	Lens
STLT	2'	F14 T5 F24 T5HO	TB Table Mount	120v 277V	12"	Specify number of sections to be linked	PR Prismatic AC White
	3'	F21 T5 F39 T5HO					
	4'	F28 T5 F54 T5HO					
STLT			TB		12"		

*Each section requires a jbox and ballast