



# Stiletto™ Mono & Duo

## SPECIFICATIONS

### Construction

Base: Cast Aluminum  
 Tube: 18ga. Cold Rolled Steel  
 Reflector: 20ga. steel with high reflectance white paint.

### Lensing

UV stable extruded clear or white linear prismatic acrylic

### Finishes

Satin nickel with clear lacquer coating

### Mounting


Mounts vertically to single gang junction box. I. Tube rotates 330

### Electrical

ETL listed damp location.  
 Specify 120 or 277v. Lamps by others.

### Modifications

Contact local representatives or factory for size, lamping, lens or finish modifications.

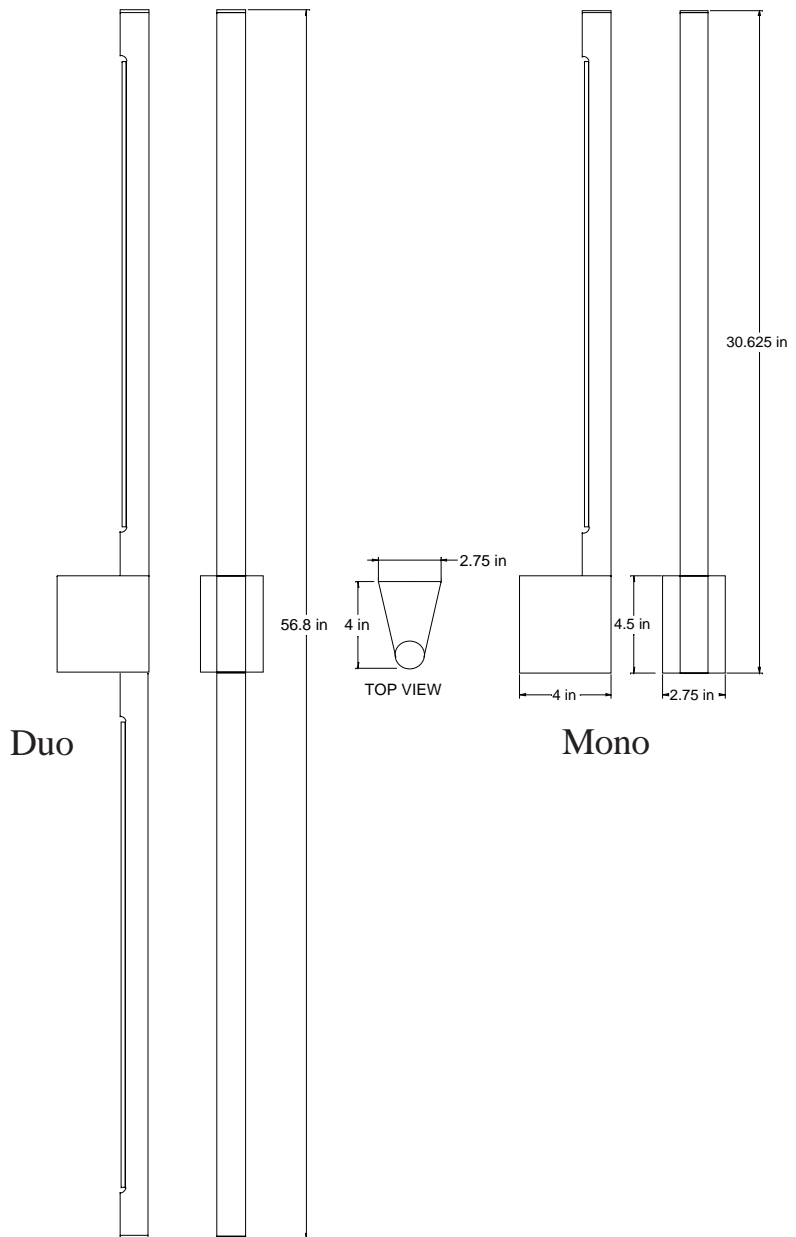

## ORDERING LOGIC

Use matrix below to order complete fixture

Family	Lamping	Voltage*	Options
STM	1xF14 T5	120v	PR Prismatic Lens
STD	2xF14 T5	277v	AC White Lens

\*Required