




# Stiletto™ Table AL

Table Light

**Sections can be joined in the field for continuous runs**

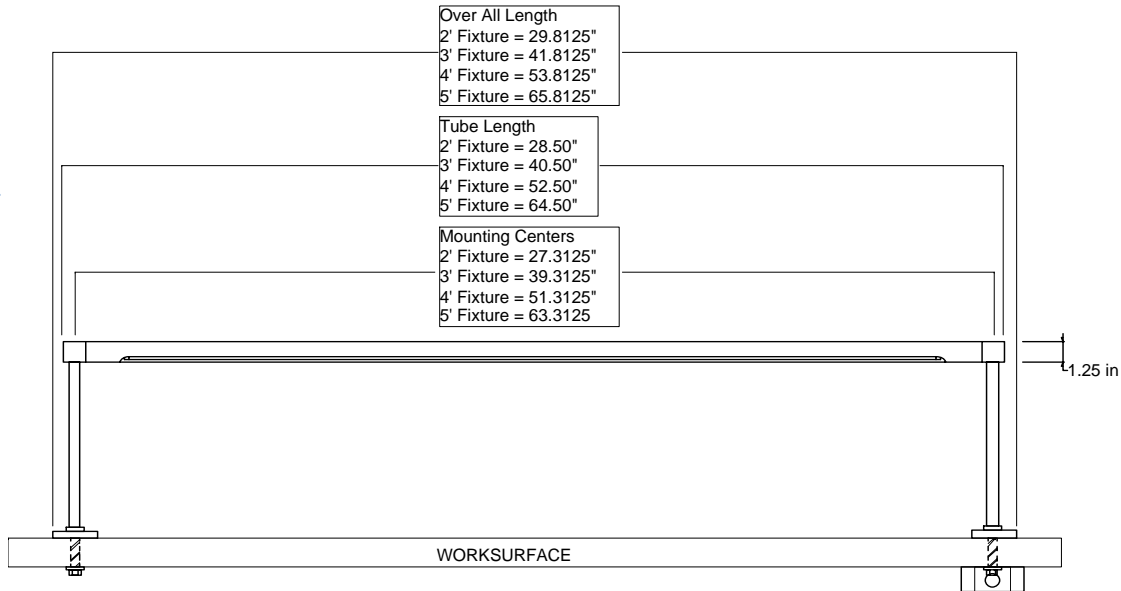

## SPECIFICATIONS

### Construction

**Tube:** 1.25" diameter extruded aluminum

**Reflector:** Aluminum with high reflectance white paint

**Rotators:** Solid machined brass. 330 deg max rotation with lock.

**Lens:** UV stable acrylic available in clear or white linear prismatic.

**Stem:** 12" overall height standard.

**Optional heights available**

### Finish

Brushed Aluminum with clear coat after fabrication.

### Mounting

Through bolted to work surface. Mounts to deep 4x4 junction box. Fixtures can be joined in field to create continuous run. Specify number of sections.

### Electrical

ETL listed damp location. Lamps supplied by others. Electronic ballast mounted in junction box under work surface. 12' three conductor cord supplied with fixture.

## ORDERING LOGIC

Use matrix below to order complete fixture

Family	Model	Lamping	Table Thickness	Voltage	Stem	Row Mount*	Lens
STLTAL	2'	F14 T5		120v	12"	Specify number of sections to be linked	PR Prismatic AC White
	3'	F21 T5					
	4'	F28 T5					
	5'	F35 T5					
STLTAL			Inches	120v	12"		

\*Each section requires a jbox and ballast